


PI- 55-5 (PI1014/40)

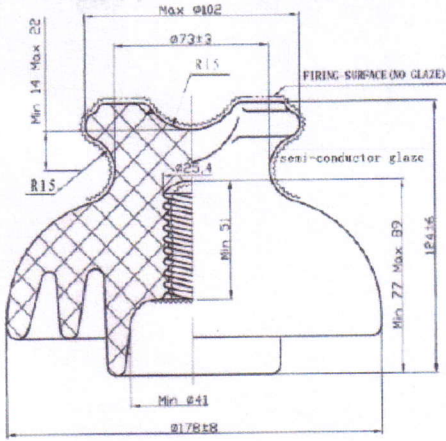

Technical Data

Colour		Brown
Creepage Distance		305mm
Protected Creepage Distance		159mm
Mechanical Strength Load		13KN
Low Frequency Withstand Voltage	Dry	80KV
	Wet	40KV
Critical Impulse Flashover Voltage	Pos	130KV
	Neg	150KV
Power Frequency Puncture Voltage		115KV
Radio Influence Voltage	Test Voltage to Ground	15KV
	Max RIV at 1000kHz 50uV	100µV

Technical Data

Colour		Brown
Creepage Distance		630mm
Protected Creepage Distance		290mm
Mechanical Strength Load		4KN
Power Frequency Flashover Voltage	Dry	124KV
	Wet	84KV
Power Frequency Withstand Voltage	Dry	121KV
	Wet	76KV
Impulse Flashover	Pos	187KV
	Neg	362KV
Impulse Withstand Voltage		183KV
Tested to		IEC 383


Technical Data

Colour		Brown
Creepage Distance		786mm
Dry Arching Distance		320mm
Mechanical Strength Load		4KN
Power Frequency Withstand Voltage	Dry	125KV
	Wet	100KV
Critical Impulse Flashover Voltage	Pos	210KV
	Neg	324KV
Tested to		IEC 383


Technical Data

Colour		Brown
Creepage Distance		400mm
Dry Arching Distance		218mm
Mechanical Strength Load		4KN
Power Frequency Withstand Voltage	Dry	97KV
	Wet	65KV
Critical Impulse Flashover Voltage	Pos	164KV
	Neg	263KV
Tested to		IEC 383

PI-472 Un-Capped

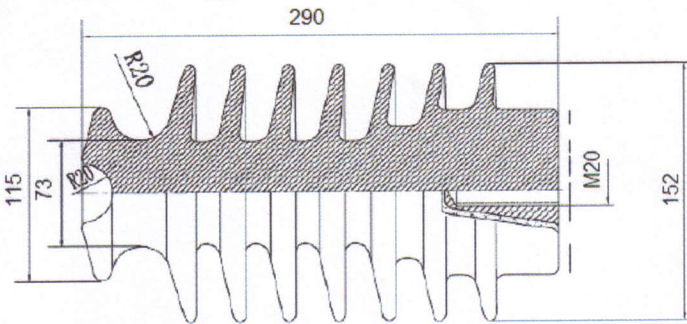

PI-480 Capped 33KV

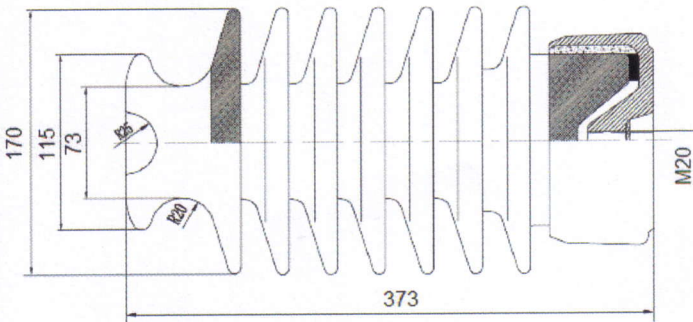

PI 356 Capped 22KV

